# SECURE. PROVEN. FLEXIBLE.



# EUROPEAN BILL ACCEPTOR (EBA-3X SERIES)

The EBA-3x Series is the default bill validator in the central European markets because of its excellent balance of performance, security and cost. The EBA-3x Series is a proven high security acceptor with the best anti-stringing technology in its class. Its unique design means it is perfect for a wide range of uses, such as AWP, vending and parking machines. The EBA is the perfect solution because its high security and reliability result in a low cost of ownership. Try it today, and you'll understand why customers everywhere love the EBA.

### **FEATURES**

- · Automatic centering
- · Accepts notes up to 85mm wide
- · The industry's best anti-stringing technology
- · Available with or without lockable stacker box

# **BENEFITS**

- 95%+ acceptance rate
- · Accepts most of the world's currencies
- · Defeats stringing attempts
- · Gives installation flexibility



#### **BANKNOTE SIZE**

- · Width: 62 85mm
- · Length: 120 160mm

#### **ACCEPTANCE RATE**

· No less than 95%

### **VALIDATION SPEED**

- · Approx 2 seconds (head alone)
- · Approx 4 seconds (with SD3 stacker)

# **ESCROW**

· For 1 banknote

#### SUPPORTED PROTOCOLS

- · EBA-32/36: ID-003 Serial, ccTalk
- · EBA-34: ID-003 Serial, MDB

# **STACKER CAPACITY (SD3)**

· 400 notes

### **POWER REQUIREMENTS**

- · 12V +/- 5% (EBA-32/36)
- · 12V +/- 5% and 24V +/- 10% selectable (EBA-34)

#### **DIMENSIONS (WxDxH)**


- EBA-3x Head Unit: 115 x 225 x 86, including bezeL
- EBA-3x-SD3: 115 x 225 x 317, including bezel

#### WEIGHT

Approx. 165g (0.36 lbs) without batteries and SD card

# **APPROVALS**

· CE

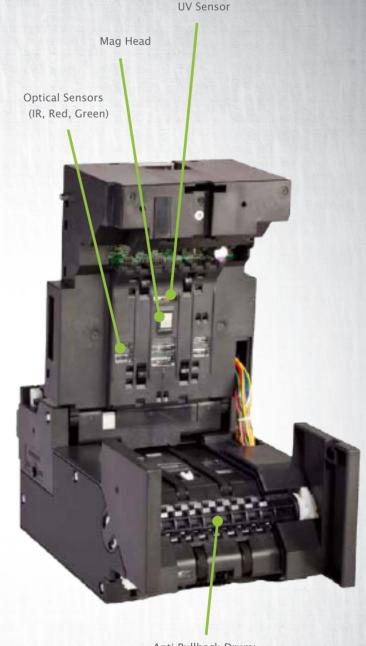

Anti-Pullback Drum: The industry's best anti-stringing protection



AMERICAS: 1.702.651.0000 • AUSTRALASIA: 61.2.9648.0811 • EMEA: 49.211.5306.4550 JAPAN: 81.6.6703.8400 • MACAU: 853.2872.2684 • US: 1.800.683.7248

jcmglobal.com

JCM and JCM logo are registered trademarks of Japan Cash Machine Co., Ltd. and JCM American Corporation. All other marks are registered trademarks of their respective owners. JCM reserves the right to change product specifications without notice.