

TAIKO™ (PUB-7/11)

Flexible. Efficient. Practical.



FRAUD PROTECTION

- Drum-winding technology prevents stringing/fishing

ATTRACTS CUSTOMERS

- Rainbow bezel with full-color display

HIGH ACCEPTANCE

- 95% first-time acceptance rate

SELECTABLE INTERFACE

- DIP switch allows protocol setting flexibility

MULTIPLE BEZEL OPTIONS

- 82mm bezel accepts most currencies

JCM'S TAIKO BILL ACCEPTOR is small, attractive and powerful. Its revolutionary drum winding technology transports banknotes and acts as an effective anti-stringing mechanism. Taiko features the latest sensor technology (blue, red, NIR and IR sensors) to ensure a high level of validation security, and its selectable DIP switches puts the power in your hands.

Taiko™ (PUB-7/11)

Flexible. Efficient. Practical.

BANKNOTE SIZE

- Width: 62–82mm (2.44–3.23")
- Length: 120–160mm (4.72–6.30")

ACCEPTANCE RATE

- 95% or higher

DIMENSIONS (HxWxD)

- 88x100x98mm (3.46x3.94x3.86")*

ENVIRONMENT

- Operating: 5 to 50°C (41 to 122°F)
- Storage: -20 to 60°C (-4 to 140°F)

WEIGHT

- 0.6kg (1.32 lbs)
- INTERFACE Photo-Coupler, TTL

PROTOCOLS

- MDB, ID003, ccTALK

SUPPLY VOLTAGE


- 12V DC, 2A recommended
- Standby: 12 VDC, 0.1A 24VDC 0.1A
- Operation: 12VDC 0.5A 24VDC 0.5A
- Peak: 12VDC 1.4A 24VDC 1.0A

ADDITIONAL OPTIONS

- Reads barcode tickets

TECHNICAL SUPPORT

- Training classes are available for all JCM products

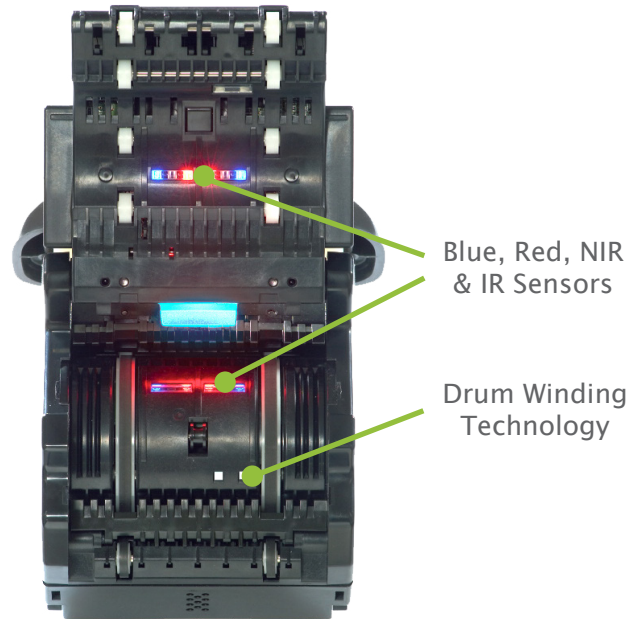

FOUR BEZELS AVAILABLE



JCM American Corporation
925 Pilot Road
Las Vegas, NV 89119
USA
Tel: 800-683-7248
(800# for USA, Canada & Mexico)
Tel: 702-651-0000

Japan Cash Machine Co., Ltd.
N2-23-2, Higashi Nihonbashi,
Chuo-ku
Tokyo 103-0004
Japan
Tel: 81-3-5962-3731

JCM Europe GmbH
Mundelheimer Weg 60
D-40472 Dusseldorf
Germany
Tel: 49-211-530645-0



REV 09.16.16